

## ODF Series Fiber Optic Rack Mount Splice Enclosure

### Description:

The case is made of cold rolled steel sheet, electrostatic spraying, provide 12&72 adapter, available for FC/SC/LC/DIN



### Features:

- Fit for 19" rack
- Reliable fastening, stripping and earthing devices for optic fiber
- Fiber splice tray make fiber avoid damaging
- Suitable for DIN、FC、SC、LC(SC Feet), etc.

### Performance:

#### Operating condition

- Operating temperature: -25 °C ~ +40 °C
- Storage temperature: -25°C ~ +40°C
- Relative humidity: ≤85% (+30°C)
- Air pressure: 70Kpa ~ 106Kpa
- Color: Beige




**GPX07C1**

### Dimension:

Model	Dimension (HxWxD)
GPX07C1-1U	1U×483mm×300mm
GPX07C1-2U	2U×483mm×300mm
GPX07C1-3U	3U×483mm×300mm
GPX07C1-4U	4U×483mm×300mm

## ODF Series Fiber Optic Rack Mount Splice Enclosure

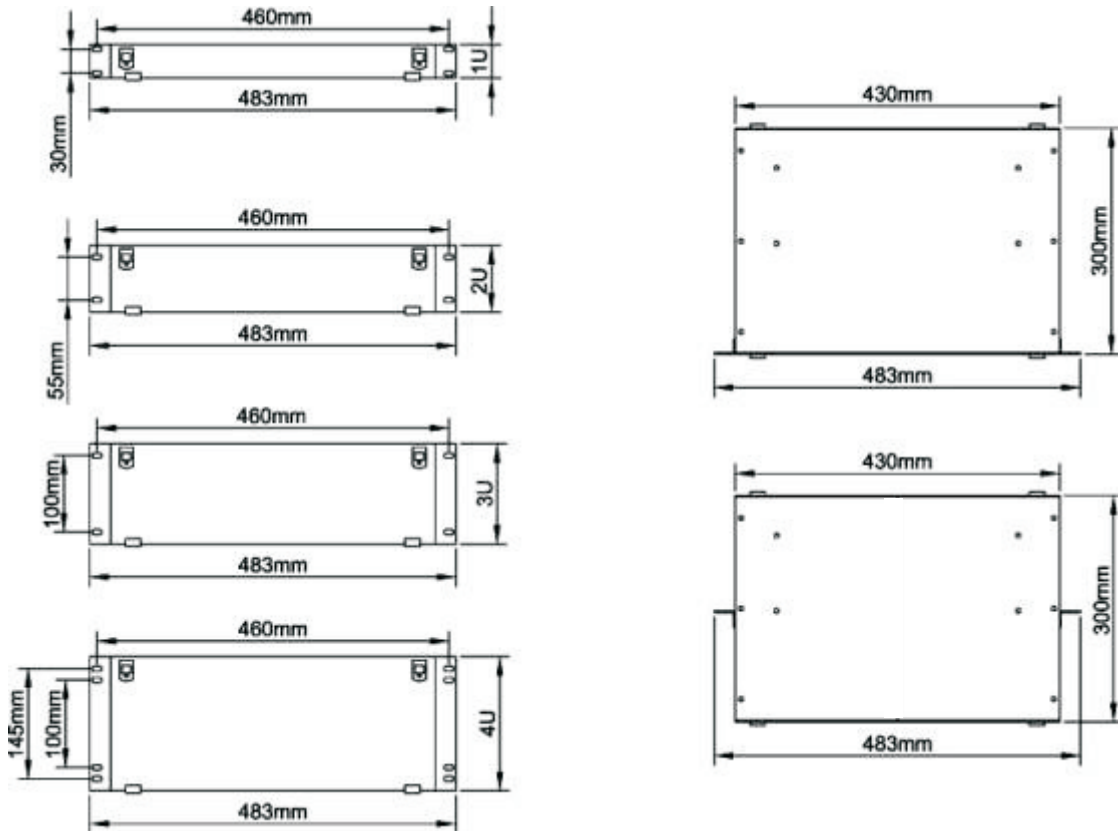

### Accessories:

1	Heat shrinkable tube	—
2	Nylon Locking Tie Wraps	3PCS
3	M6 Rack-Screw	4PCS
4	Fix Cable Sticker	3PCS
Notice: “--- ” the number is same to fiber cord number		

\* Length: 480mm Width: 300mm Height: 3U Weight: 3.1kg Color: Beige

\* Cable entry 4× Ø20mm gland holes