

# Fiber Patch Panel




GPX08X4-32Core

## Discription

The case is made of cold rolled steel sheet, electrostatic spraying, provide 32 single and double adapter, available for SC, LC, FC, ST.

## Application

- Optical Access Network (OAN)
- Data Processing Centers
- Cable Television (CATV)
- Local Area Network (LAN)
- Coarse Wavelength Division Multiplexer (CWDM)

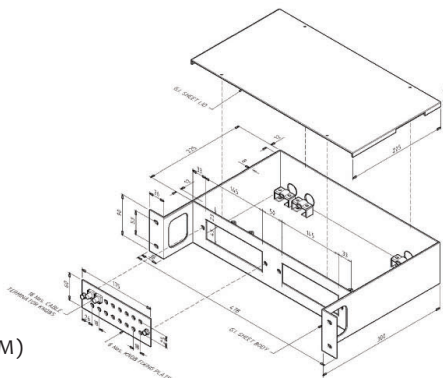

## Feature

- Removable panel design can meet different requirements
- Fit for 19" rack
- Suitable for FC, SC, LC, ST, etc

## Mechanical & Environmental Characteristics

ITEM	CHARACTERISTICS
Operation Temperature	-25°C~+40°C
Storage Temperature	-25°C~+55°C
Relative Humidity	≤85%(+30°C)
Air Pressure	70Kpa~106Kpa
Color	Beige and Black

## Accessories

NO	NAME	QUANTITY
1	Heat Shrinkable Tube	-----
2	Nylon Locking Tie Wraps	4 PCS
3	Cable Hoop	2 PCS
4	M6 Rack-Screw	4 PCS
5	Adhesive Block	4 PCS

Notice: "----" the number is same to fiber cord number